STUDIO PENDANT
MODELS: 1780C-P-BO, 1780C-P-HO

IMPORTANT - READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.
THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES, BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT, AND THE HAZARDS INVOLVED. PROPER GROUNDING IS REQUIRED FOR SAFETY.

CABLE LENGTH ADJUSTEMENT (1780C-P)

IF CABLE LENGTH IS RIGHT AND NO ADJUSTMENT IS NEEDED, REFER TO THE FOLLOWING STEPS ON THE NEXT PAGE.

A- UNFASTEN THE SET SCREW.
B- ADJUST THE POWER CORD LENGTH AND TIGHTEN THE SET SCREW TO LOCK POSITION. LEAVE 4 TO 6" ABOVE THE CANOPY (FOR CONNECTIONS) AND CUT THE CORD SURPLUS.

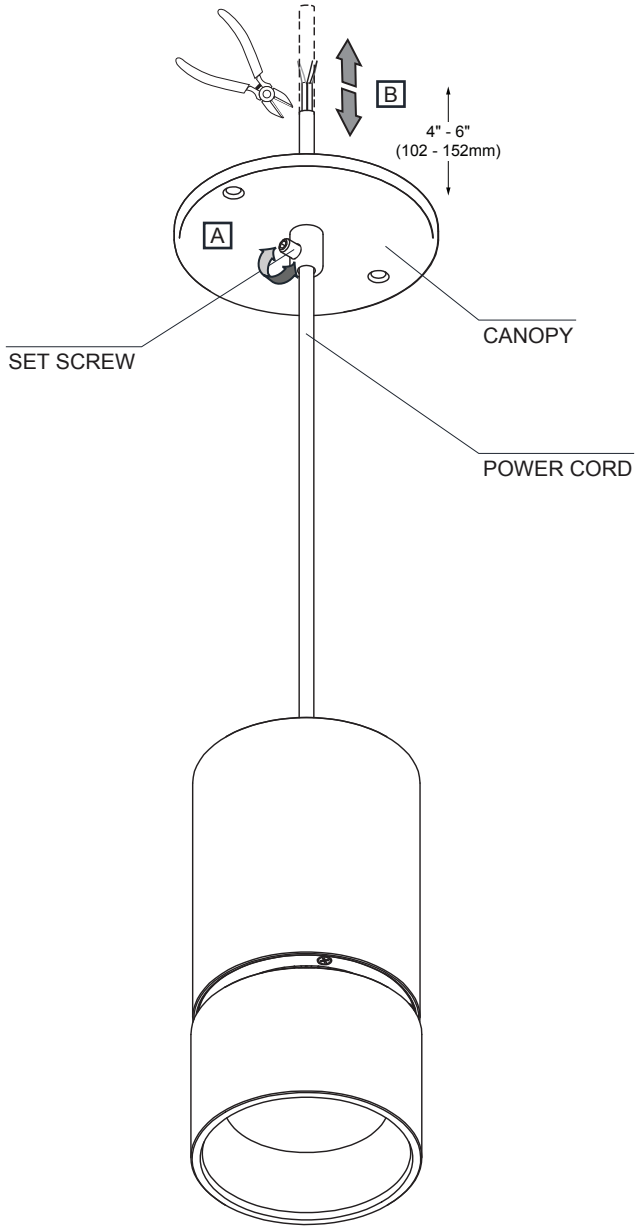

SISTEMALUX
9320 Boul. St-Laurent, suite 100, Montréal (Québec) Canada H2N 1N7
P.: 514.523.1339 F.: 514.525.6107 www.sistemalux.com

INSTALLING PENDANT WITH CANOPY (1780C-P)

A- RAISE FIXTURE TO CEILING AND MAKE ALL NECESSARY CONNECTIONS. *FOR OPTIONAL DIMMING 0-10V: WIRES MUST BE RUN THROUGH A SEPARATE KNOCK OUT HOLE WHEN CONNECTING DIMMING CONTROLLER.
B- SCREW CANOPY FIXTURE IN JUNCTION BOX USING THE TWO PHILLIPS HEAD SCREWS PROVIDED.

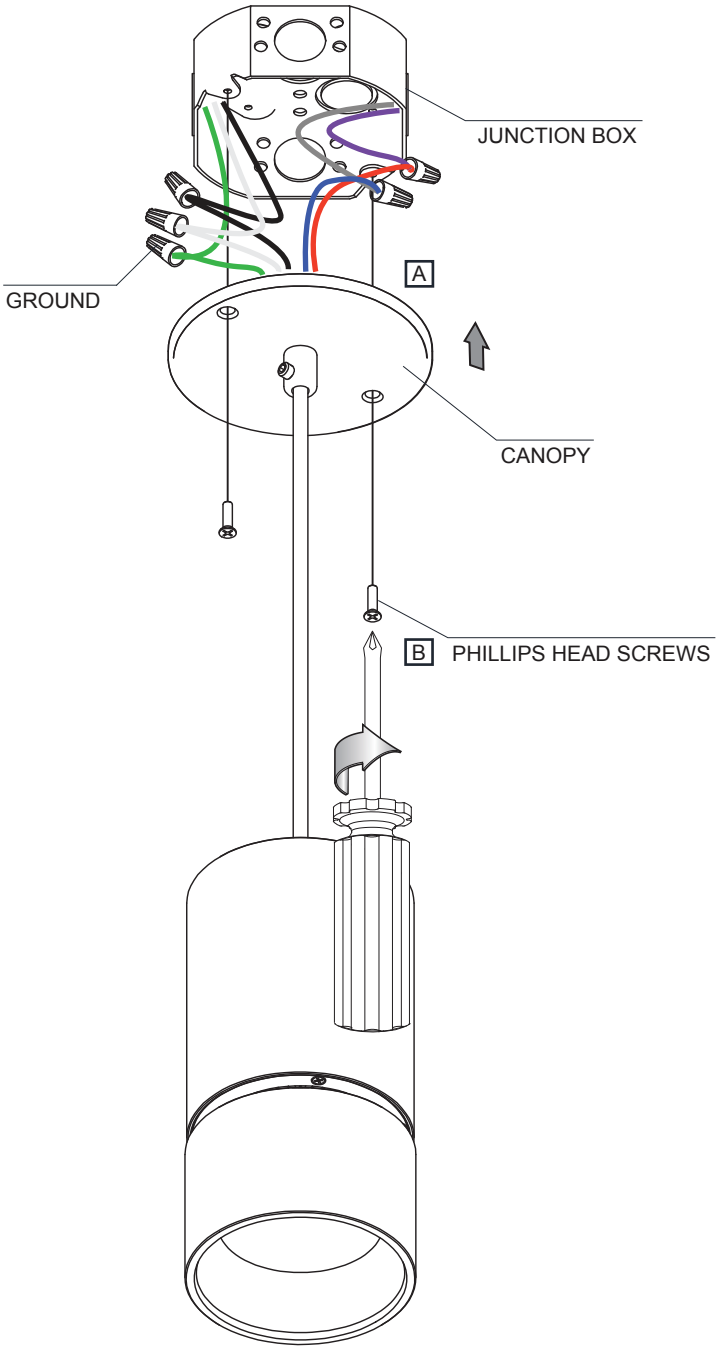

A **WIRE COLOR / FUNCTION**

GREEN	/ GROUND
WHITE	/ NEUTRAL
BLACK	/ LINE INPUT
RED / PURPLE	/ DIM +
BLUE / GRAY	/ DIM -

UNV (120-277V)



0-10 V DIMMING*

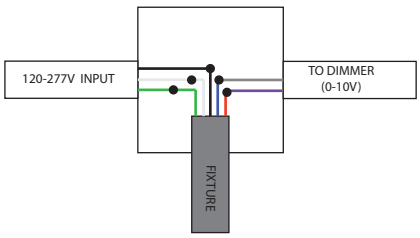

SISTEMALUX
9320 Boul. St-Laurent, suite 100, Montréal (Québec) Canada H2N 1N7
P.: 514.523.1339 F.: 514.525.6107 www.sistemalux.com

ACCESSORIES

A- UNSCREW AND REMOVE THE OPTIC HOLDER
B- PLACE ACCESSORY BETWEEN THE OPTIC HOLDER AND THE ACCESSORY HOLDER
C- RE-INSTALL THE OPTIC HOLDER BACK IN PLACE.

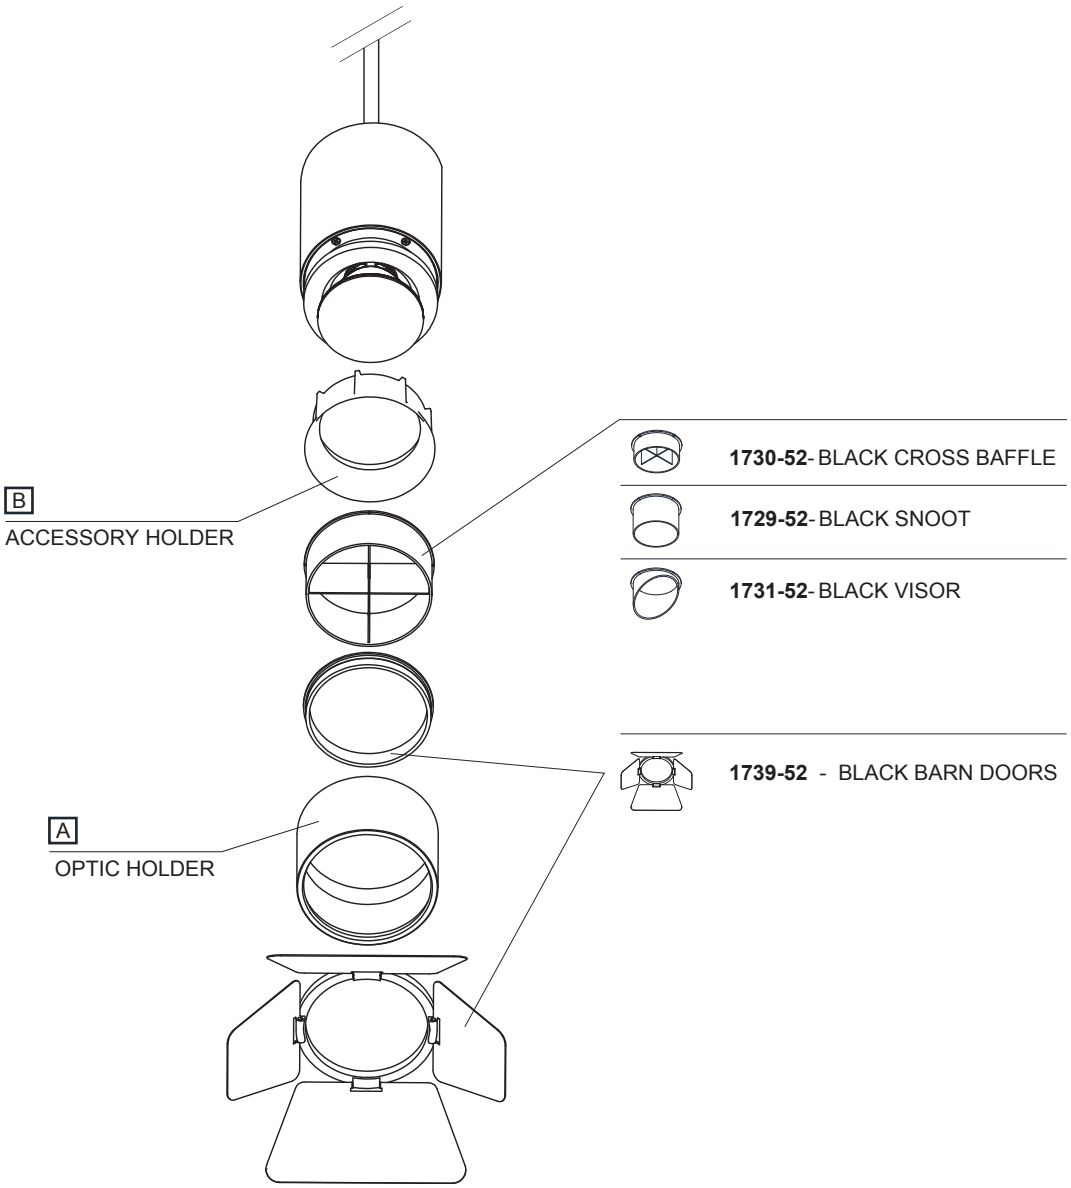

SISTEMALUX
9320 Boul. St-Laurent, suite 100, Montréal (Québec) Canada H2N 1N7
P.: 514.523.1339 F.: 514.525.6107 www.sistemalux.com

REPLACING OPTIC

A- UNSCREW AND REMOVE THE OPTIC HOLDER TO ACCESS THE REFLECTOR.
B- REPLACE THE REFLECTOR AND RE-INSTALL THE OPTIC HOLDER BACK IN PLACE.

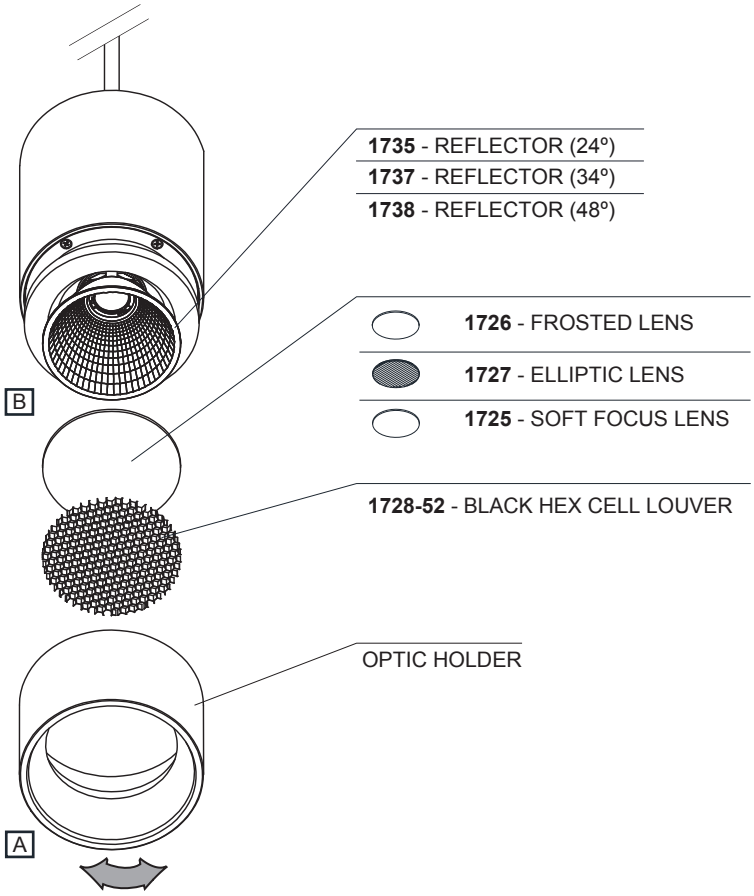

SISTEMALUX
9320 Boul. St-Laurent, suite 100, Montréal (Québec) Canada H2N 1N7
P.: 514.523.1339 F.: 514.525.6107 www.sistemalux.com