

Over All is a collection of exterior luminaires for architectural and landscape lighting. The innovative design simplifies the installation without requiring a back box. Over All can be fastened to any hard surface or mounted directly to the ground with a spike. Suitable for installation in concrete slabs, pavers, wood decks in new construction or retrofit applications. This series of uplighter is available in 3 sizes with a complete range of light distributions for accent lighting and wall washing.

**Luminaire characteristic:**

**Power input:** 2.5W to 20.5W (system wattage)  
**Lumens:** 160lm to 1 710 lm (for 3000K, 90CRI)  
**Luminaire efficacy:** Up to 88lm/W

**Source:** White LED (LM-80 tested),  
3000K: 90CRI,  
4000K: 90CRI.

**Lumen maintenance:** 80% of initial lumens at 50 000 hours (L80) (LM-80)

**Optic:** Available in spot, flood, wide flood, asymmetric and narrow elliptical.

**Material:** Body: Die-cast aluminum  
Lens: Clear polycarbonate

**Mounting:** To be mounted on ground surface.  
Stake accessory available for gardens  
Supplied with 16ft (5m) of power cable.

**Electrical:** See remote LED driver options on page 8.

**Dimming:** Remote LED driver 0-10V, down to 0%.

**Finish:** Aluminum gray painted finish, following a double powder paint in 3 step process: surface treatment containing ceramic nano particles (Bonderite). Epoxy primer paint. Polyester powder paint with high resistance against UV rays and harsh weather conditions.

**Weight:** Micro over-all: 1.32lbs (0.6kg)  
Mini over-all: 2.65lbs (1.2kg)  
Over-all: 3.97lbs (1.8kg)

**Warranty:** 5 year limited warranty.


**Ratings:** IP67, IK08 Micro over-all  
IP67, IK07 Mini over-all  
IP67, IK09 Over-all

**Certification:** cULus listed for wet location.





**FAMILY OVERVIEW**



**MICRO OVER-ALL**  
4 3/4" (ø120mm)

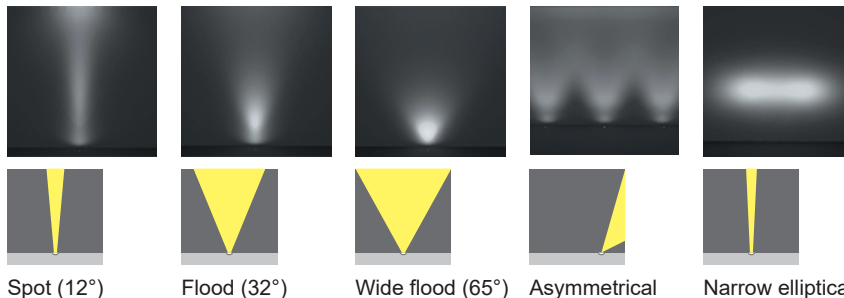

**MINI OVER-ALL**  
7 1/8" (ø200mm)

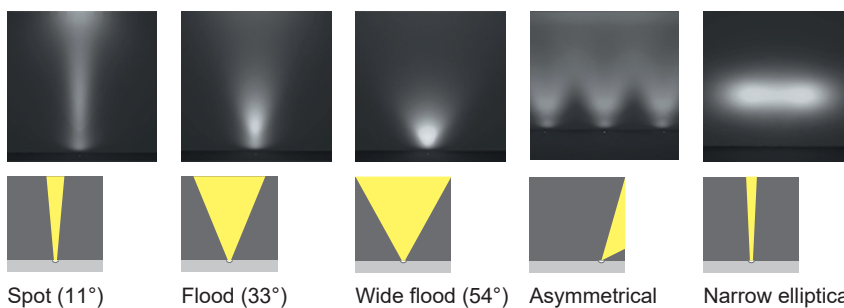


**OVER-ALL**  
10 1/4" (ø260mm)

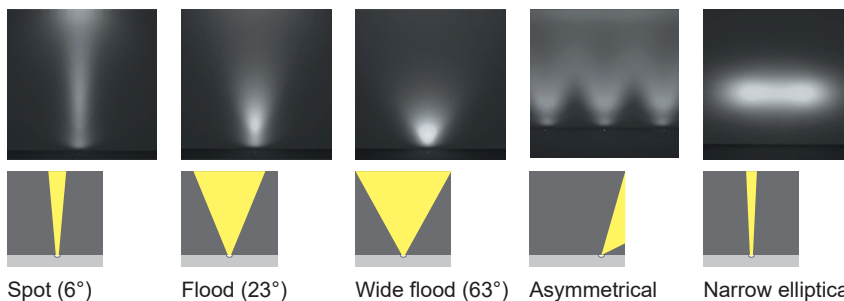


**DIMENSIONS**


**MICRO OVER-ALL**  
4<sup>3</sup>/<sub>4</sub>" (ø120mm)




**MINI OVER-ALL**  
7<sup>7</sup>/<sub>8</sub>" (ø200mm)

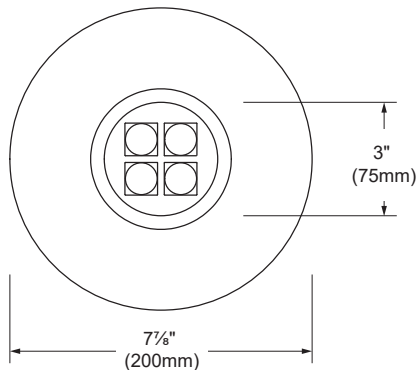

**OVER-ALL**  
10<sup>1</sup>/<sub>4</sub>" (ø260mm)

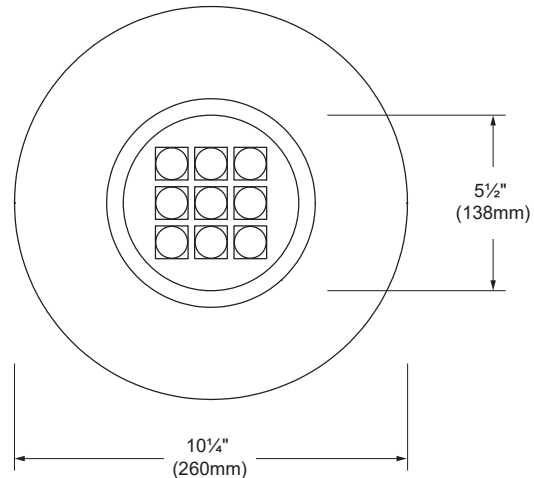

**TOP VIEW**

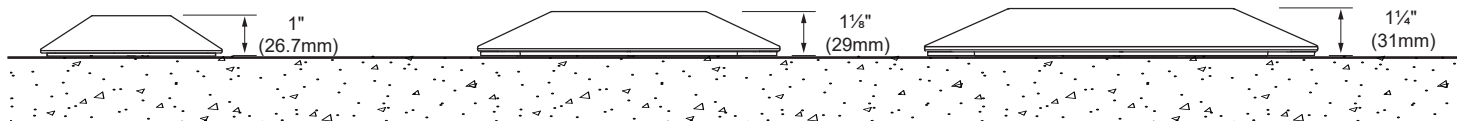

**SIDE VIEW**

**PHOTOMETRIC DATA**


Visit [sistimalux.com](http://sistimalux.com) for complete photometric data.

**MICRO OVER-ALL**  
4 3/4" (ø120mm)




CCT (K)*	CRI	LOAD (W)	OPTIC	LUMENS (lm)	EFFICACY (lm / w)	MAX CANDELA (cd)	MODELS
3000K	90	2.5W	Spot 12°	170	77	2 450	S1920W
			Flood 32°	170	77	435	S1921W
			Wide flood 65°	175	79	145	S1920WWF
			Asymmetrical	160	72	540	S1925W
			Narrow elliptical	195	88	1 235	S1920WEO
4000K	90	2.5W	Spot 12°	210	95	2 955	S1920N
			Flood 32°	205	93	555	S1921N
			Wide flood 65°	185	84	155	S1920NWF
			Asymmetrical	195	88	740	S1925N
			Narrow elliptical	205	93	1 230	S1920NEO

Spot 12° (3000K, 90CRI)




Center beam fc	Beam width ft	
12ft	17	2.6
10ft	24.5	2.2
8ft	38.3	1.3
6ft	68.1	1.7
4ft	153	0.9
2ft	613	0.4

Flood 32° (3000K, 90CRI)




Center beam fc	Beam width ft	
12ft	3.05	7.1
10ft	4.40	5.9
8ft	6.87	4.7
6ft	12.2	3.7
4ft	27.5	2.4
2ft	110	1.2

Wide flood 65° (3000K, 90CRI)




Center beam fc	Beam width ft	
12ft	1.02	15.5
10ft	1.47	13.0
8ft	2.29	10.4
6ft	4.07	7.8
4ft	9.16	5.2
2ft	36.6	2.6

Asymmetrical (3000K, 90CRI)




Narrow elliptical (3000K, 90CRI)



**PHOTOMETRIC DATA**


Visit [sistemalux.com](http://sistemalux.com) for complete photometric data.

**MINI OVER-ALL**  
7 7/8" (ø200mm)




CCT (K)*	CRI	LOAD (W)	OPTIC	LUMENS (lm)	EFFICACY (lm / w)	MAX CANDELA (cd)	MODELS
3000K	90	9W	Spot 12°	680	75	10 385	S1900W
			Flood 32°	675	75	1 635	S1901W
			Wide flood 54°	680	75	735	S1900WWF
			Asymmetrical	650	72	2 345	S1905W
			Narrow elliptical	770	85	4 795	S1900WEO
4000K	90	9W	Spot 12°	805	89	11 760	S1900N
			Flood 32°	770	85	2 015	S1901N
			Wide flood 54°	715	79	625	S1900NWF
			Asymmetrical	740	82	2 510	S1905N
			Narrow elliptical	810	90	5 300	S1900NEO

Spot 12° (3000K, 90CRI)




Center beam fc	Beam width ft	
12ft	72.1	2.5
10ft	104	2.1
8ft	162	1.6
6ft	289	1.2
4ft	649	0.8
2ft	2 597	0.4

Flood 32° (3000K, 90CRI)




Center beam fc	Beam width ft	
12ft	11.4	7.2
10ft	16.4	6.0
8ft	25.6	4.8
6ft	45.4	3.6
4ft	102	2.4
2ft	409	1.2

Wide flood 54° (3000K, 90CRI)




Center beam fc	Beam width ft	
12ft	5.11	12.3
10ft	7.35	10.2
8ft	11.5	8.2
6ft	20.4	6.1
4ft	46.0	4.1
2ft	184	2.0

Asymmetrical (3000K, 90CRI)




Narrow elliptical (3000K, 90CRI)



**PHOTOMETRIC DATA**


Visit [sistemalux.com](http://sistemalux.com) for complete photometric data.

**OVER-ALL**  
**10 1/4" (ø260mm)**



CCT (K)*	CRI	LOAD (W)	OPTIC	LUMENS (lm)	EFFICACY (lm / w)	MAX CANDELA (cd)	MODELS
3000K	90	20.5W	Spot 12°	1 565	77	24 185	S1910W
			Flood 32°	1 485	73	3 545	S1911W
			Wide flood 63°	1 545	76	1 395	S1910WWF
			Asymmetrical	1 495	74	5 440	S1915W
			Narrow elliptical	1 710	84	10 390	S1910WEO
4000K	90	20.5W	Spot 12°	1 670	82	26 120	S1910N
			Flood 32°	1 620	80	4 100	S1911N
			Wide flood 63°	1 750	86	1 775	S1910NWF
			Asymmetrical	1 470	72	4 915	S1915N
			Narrow elliptical	1 970	97	11 485	S1910NEO


Spot 12° (3000K, 90CRI)



■ -0° H

Center beam fc	Beam width ft	
12ft	168	2.5
10ft	242	2.1
8ft	378	1.7
6ft	672	1.2
4ft	1 512	0.8
2ft	6 047	0.4


Flood 32° (3000K, 90CRI)



■ -0° H

Center beam fc	Beam width ft	
12ft	24.6	7.4
10ft	35.5	6.1
8ft	55.4	4.9
6ft	98.5	3.7
4ft	222	2.5
2ft	886	1.2


Wide flood 63° (3000K, 90CRI)



■ -0° H


Center beam fc	Beam width ft	
12ft	9 69	14.7
10ft	14.0	12.3
8ft	21.8	9.8
6ft	38.8	7.4
4ft	87.3	4.9
2ft	349	2.5

Asymmetrical (3000K, 90CRI)



■ -0° H ■ -90° H ■ -Max Cd: 110° H

Narrow elliptical (3000K, 90CRI)



■ -0° H ■ -90° H

**ACCESSORIES (TO BE ORDERED SEPARATELY)**  
For installation consult instruction sheet.

STAKE FOR GROUND INSTALLATION:

- S1014** - For micro over-all  
Length: 7½" (190mm)
- S3524** - For mini over-all and over-all  
Length: 10¾" (270mm)

**ORDERING INFO**

**- REM - 14**  
FIXTURE

**MICRO OVER-ALL 4¾" (120MM)**

- |  |  |  |  |  |
|--|--|--|--|--|
| Spot (12°)                                     | Flood (32°)                                    | Wide flood (65°)                                 | Asymmetrical                                   | Narrow elliptical                                |
| <input type="checkbox"/> <b>S1920W</b> - 3000K | <input type="checkbox"/> <b>S1921W</b> - 3000K | <input type="checkbox"/> <b>S1920WWF</b> - 3000K | <input type="checkbox"/> <b>S1925W</b> - 3000K | <input type="checkbox"/> <b>S1920WEO</b> - 3000K |
| <input type="checkbox"/> <b>S1920N</b> - 4000K | <input type="checkbox"/> <b>S1921N</b> - 4000K | <input type="checkbox"/> <b>S1920NWF</b> - 4000K | <input type="checkbox"/> <b>S1925N</b> - 4000K | <input type="checkbox"/> <b>S1920NEO</b> - 4000K |

**MINI OVER-ALL 7¾" (200MM)**

- |  |  |  |  |  |
|--|--|--|--|--|
| Spot (12°)                                     | Flood (32°)                                    | Wide flood (54°)                                 | Asymmetrical                                   | Narrow elliptical                                |
| <input type="checkbox"/> <b>S1900W</b> - 3000K | <input type="checkbox"/> <b>S1901W</b> - 3000K | <input type="checkbox"/> <b>S1900WWF</b> - 3000K | <input type="checkbox"/> <b>S1905W</b> - 3000K | <input type="checkbox"/> <b>S1900WEO</b> - 3000K |
| <input type="checkbox"/> <b>S1900N</b> - 4000K | <input type="checkbox"/> <b>S1901N</b> - 4000K | <input type="checkbox"/> <b>S1900NWF</b> - 4000K | <input type="checkbox"/> <b>S1905N</b> - 4000K | <input type="checkbox"/> <b>S1900NEO</b> - 4000K |

**OVER-ALL 10¾" (260MM)**

- |  |  |  |  |  |
|--|--|--|--|--|
| Spot (12°)                                     | Flood (32°)                                    | Wide flood (63°)                                 | Asymmetrical                                   | Narrow elliptical                                |
| <input type="checkbox"/> <b>S1910W</b> - 3000K | <input type="checkbox"/> <b>S1911W</b> - 3000K | <input type="checkbox"/> <b>S1910WWF</b> - 3000K | <input type="checkbox"/> <b>S1915W</b> - 3000K | <input type="checkbox"/> <b>S1910WEO</b> - 3000K |
| <input type="checkbox"/> <b>S1910N</b> - 4000K | <input type="checkbox"/> <b>S1911N</b> - 4000K | <input type="checkbox"/> <b>S1910NWF</b> - 4000K | <input type="checkbox"/> <b>S1915N</b> - 4000K | <input type="checkbox"/> <b>S1910NEO</b> - 4000K |

**VOLTAGE**

- REM** - Remote

**FINISH**

- 14** - Aluminum gray

**REMOTE LED DRIVER OPTIONS**  
(TO BE ORDERED SEPARATELY)

							Min-max units		
Watts	Voltage	Rated	Dimming protocol	Dimming range	Dimensions	Max distance**	Micro 2.2W	Mini 9W	Over-all 20.2W
<input type="checkbox"/> <b>4444-0700-006-UNV-ND</b>									
06	120-277V	Indoor	No dimming	-	6" x 4" x 3" (152 x 102 x 76mm)	30ft(9m)	1-2		
<input type="checkbox"/> <b>4444-0700-011-UNV-ND</b>									
11	120-277V	Indoor	No dimming	-	6" x 4" x 3" (152 x 102 x 76mm)	30ft(9m)	3-5	1	
<input type="checkbox"/> <b>4548-0700-011-UNV-ND</b>									
11	120-277V	Outdoor	No dimming	-	6" x 4.5" x 3" (152 x 114 x 76mm)	30ft(9m)	3-5	1	
<input type="checkbox"/> <b>4444-0700-025-UNV-D10</b>									
25	120-277V	Indoor	0-10V	Down to ±10%	6" x 4" x 3" (152 x 102 x 76mm)	30ft(9m)	5-11	2	1
<input type="checkbox"/> <b>4450-0700-030-UNV-ED10</b>									
30	120-277V	Indoor	0-10V ELDOLEDECOdrive	Down to ±1%	8" x 8" x 4" (203 x 203 x 102mm)	118ft(36m)	1-12	1-3	1
<input type="checkbox"/> <b>4549-0700-030-UNV-ED10</b>									
30	120-277V	Outdoor	0-10V ELDOLED ECOdrive	Down to ±1%	14.5" x 5" x 3.5" (368 x 127 x 89mm)	118ft(36m)	1-12	1-3	1
<input type="checkbox"/> <b>4450-0700-050-UNV-SD10</b>									
50	120-277V	Indoor	0-10V ELDOLED SOLOdrive	Down to ±0.1%	8" x 8" x 4" (203 x 203 x 102mm)	118ft(36m)	1-22	1-5	1-2
<input type="checkbox"/> <b>4549-0700-050-UNV-SD10</b>									
50	120-277V	Outdoor	0-10V ELDOLED SOLOdrive	Down to ±0.1%	14.5" x 5" x 3.5" (368 x 127 x 89mm)	118ft(36m)	1-22	1-5	1-2
<input type="checkbox"/> <b>4448-0700-100-UNV-SD10</b>									
100	120-277V	Indoor	0-10V ELDOLED SOLOdrive	Down to ±0.1%	10" x 8" x 4" (254 x 203 x 102mm)	118ft(36m)	1-44	1-10	1-4
<input type="checkbox"/> <b>4549-0700-100-UNV-SD10</b>									
100	120-277V	Outdoor	0-10V ELDOLED SOLOdrive	Down to ±0.1%	6" x 4.5" x 3" (152 x 114 x 76mm)	118ft(36m)	1-44	1-10	1-4

\* Wattage requirement for one (1) fixture (Remote fixture only).

\*\*Calculated for 16AWG cable. Contact customer service for longer remote distance.

**WIRING DIAGRAMS**

\*Multiple luminaires must be connected in series (home run or fixture chain)

