


Proprietary industry leading linear LED platform with superior thermal management that yields reliable color consistency and output performance. Available as single module or continuous runs. Suitable for interior applications where general lighting is desired.

Luminaire characteristics:









Power input: 5, 7.5, 10.5 or 20W/ft
Lumens: 350, 550, 700 or 1400lm/ft (for 3000K, 85CRI)
Luminaire efficacy: Up to 75lm/W

Source:	Osram Duris®E5 JDSR (LM-80 tested) 3000K : 85CRI typical (min>80CRI) 3500K : 85CRI typical (min>80CRI) 4000K : 85CRI typical (min>80CRI)
Lumen maintenance:	70% of initial lumens at 100 000 hours (L70) (LM-79 tested).
Optics:	General lighting
Material:	Body: Extruded aluminum End caps: Die-cast aluminum Reflector: Whitelite 92% of reflectivity Diffuser: PMMA frosted acrylic (For sections longer than 8' to a maximum of 24', the frosted diffuser is delivered rolled up in a separate box).
Mounting:	Supplied with aircraft cable suspension 5' (1500mm) long. To be installed on a 4" junction box.
Electrical:	Integral high efficiency electronic power supply, rated 100 000 hours, 120-277V. Up & down model supplied standard with 2 circuits (except for 2ft unit)
Dimming:	0-10V (Down to 15%). Hi-lume BUS supply or 3-wire (both Down to 1%). Up & down model with Dimming supplied standard with 1 circuit only. 2 circuits available upon request, with additional canopy.
Finish:	White RAL9003 or gray RAL9006 painted finish.
Warranty:	5 year limited warranty.
Ratings:	IP20
Certification:	 cULus listed for damp location

LENGTH

The luminaire runs can be manufactured in most lengths with 01 feet increments.

NOMINAL LENGTHS

2'		L: 23 $\frac{3}{8}$ " (594mm)
3'		L: 35 $\frac{1}{4}$ " (895mm)
4'		L: 47" (1194mm)
6'		L: 70" (1778mm)
8'		L: 93 $\frac{1}{2}$ " (2375mm)
12'		L: 140 $\frac{1}{8}$ " (3559mm)
16'		L: 186 $\frac{5}{8}$ " (4740mm)
24'		L: 279 $\frac{7}{8}$ " (7109mm)

FEED INFORMATION

Maximum fixture length per single feed (nominal length) :

No dimming: 32' (2 circuits)

0-10V dimming: 32' (16' 1 circuit and VHO only version)

D2A dimming: 28' (14' 1 circuit and VHO only version)

D2B dimming: 44' (22' 1 circuit and VHO only version)

Main feed is located at the beginning of the first section. For longer fixtures subsequent feeds are needed. The feeds are located at the beginning of the next following section, except for the last feed who is located at the end of the last section of the fixture.


MOUNTING

All suspension fittings and canopy come in white, for other colors contact factory.
All part and hardware are included.



DEFAULT FACTORY OPTION



ALTERNATE OPTION (TO BE CHANGED ON SITE)




DIMENSIONS

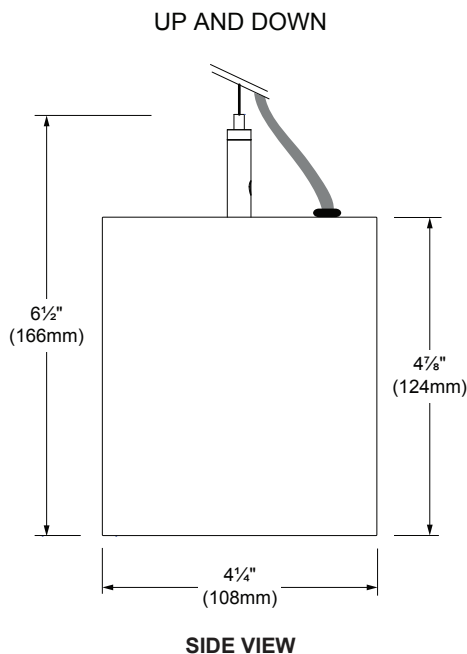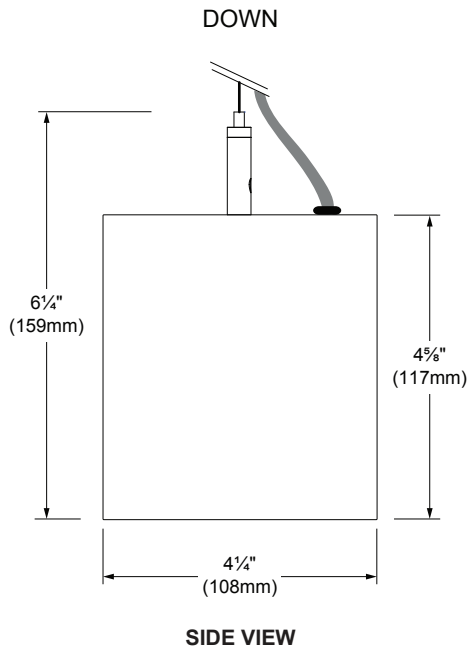

PHOTOMETRIC DATA


Photometric performance is measured at an accredited independent laboratory in accordance with IESNA LM-79. Visit sistimalux.com for complete photometric data.

GENERAL LIGHT down (8605)




CCT (K)	CRI	OUTPUT	LOAD (W/ft)	LUMENS (lm/ft)	EFFICACY (lm/W)	MODELS
3000K	85	BO	5W/ft	395	75	8605-XX-BO830
		MO	7.5W/ft	585	75	8605-XX-MO830
		HO	10.5W/ft	745	70	8605-XX-HO830
		VHO	20W/ft	1460	70	8605-XX-VHO830


3000K - 85CRI - BO - 4'




3000K - 85CRI - MO - 4'




3000K - 85CRI - HO - 4'



3000K - 85CRI - VHO - 4'




GENERAL LIGHT Up and down (8606)




CCT (K)	CRI	OUTPUT	LOAD (W/ft)	LUMENS (lm/ft)	EFFICACY (lm/W)	MODELS
3000K	85	BO-BO	9.5W/ft	885	93	8602-XX-BOBO830
		MO-MO	15W/ft	1300	86	8602-XX-MOMO830
		HO-HO	20.5W/ft	1660	80	8602-XX-HOHO830


3000K - 85CRI - BO-BO - 4'

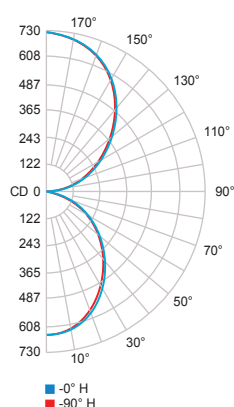

3000K - 85CRI - MO-MO - 4'

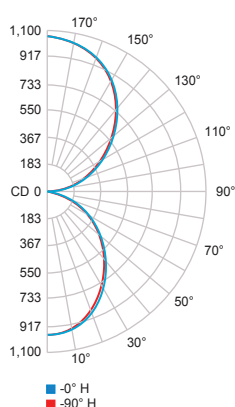

3000K - 85CRI - HO-HO - 4'

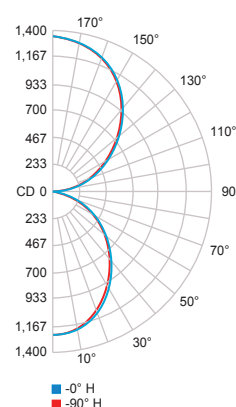

*USE MULTIPLIER TABLE FOR OTHER CCT AND CRI OUTPUT DATA

CCT options	3000K	3500K	4000K
CRI options	85CRI	85CRI	85CRI
Multiplier	1	1.09	1.19

ORDERING INFO

- - **F UNV**
FIXTURE

MODELS

☐ **8605** - Down ☐ **8606** - Up and down

LENGTH

_____ Refer to configurations table on page 2.

INDIRECT OUTPUT

☐ **BO** - Base ☐ **MO** - Medium ☐ **HO** - High

DIRECT OUTPUT

☐ **BO** - Base ☐ **MO** - Medium ☐ **HO** - High ☐ **VHO⁽¹⁾** - Very high

LED

☐ **830** - 3000K, 85CRI ☐ **835** - 3500K, 85CRI ☐ **840** - 4000K, 85CRI

OPTIC

☒ **F** - Frosted

VOLTAGE

☒ **UNV** - 120-277V

FINISH

☐ **01** - White ☐ **10** - Gray

DIMMING

☐ **D10⁽²⁾** - 0-10V (down to 15%) ☐ **D2A⁽²⁾** - Lutron Hi-lume® 3 wire (down to 1%) ☐ **D2B⁽²⁾** - Lutron Hi-lume® BUS supply (down to 1%)

⁽¹⁾ Only available for Down model (8605).

⁽²⁾ Up & down model with Dimming supplied standard with 1 circuit only. 2 circuits available upon request, with additional canopy.