SLOT / MICROSLOT

ROUND CEILING

MODEL: S.3905, S.3967

IMPORTANT - READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.
THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES, BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT, AND THE HAZARDS INVOLVED. PROPER GROUNDING IS REQUIRED FOR SAFETY.

INSTALLATION WITH 4" JUNCTION BOX
INTEGRAL DRIVER (120-277V)

A- INSTALL THE CROSSBAR AND MAKE ALL NECESSARY ELECTRICAL CONNECTIONS INTO THE JUNCTION BOX.
B- INSTALL MOUNTING PLATE USING PROVIDED SCREWS (X2).
C- UNFASTEN THE FIXTURE'S SET SCREWS (3X) USING ALLEN KEY PROVIDED IN ORDER TO RELEASE THE FIXTURE HOLDER.
D- INSTALL FIXTURE HOLDER USING PROVIDED SCREWS.
E- INSTALL FIXTURE AND FASTEN THE SET SCREWS (3X).

A - E

MICROSLOT

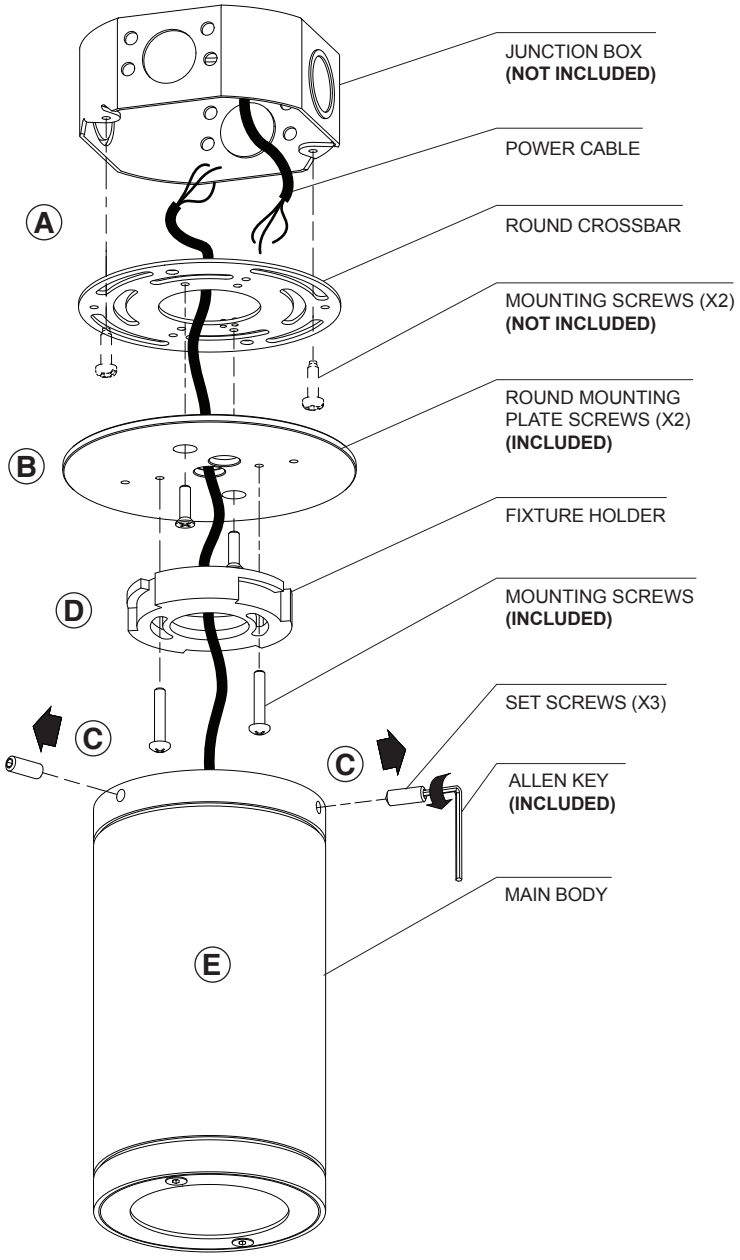

SLOT

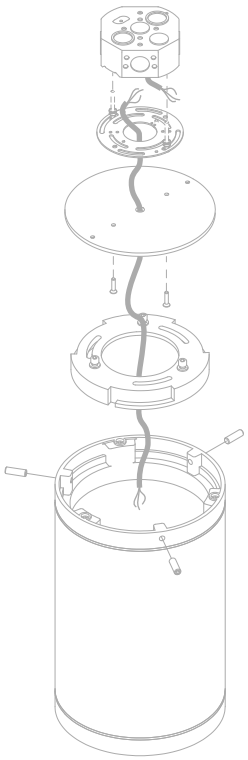

WIRING DIAGRAM

LIVE	BLACK
NEUTRAL	WHITE
⏚	GREEN

NO DIMMING



SISTEMALUX
9320 Boul. St-Laurent, suite 100, Montréal (Québec) Canada H2N 1N7
P.: 514.523.1339 F.: 514.525.6107 www.sistemalux.com