



MARKER is a luminaire conceived to be recessed in the riser of the steps. The light is controlled and oriented downward to avoid glare even when the position of the lighting fitting is higher than the height of the point of view.


Luminaire characteristic:

Power input: 8.3W
Lumens: 96lm (for 3000K, 80CRI)
Luminaire efficacy: Up to 12lm/W


Source:	White LED (LM-80), 3000K: 80CRI, 4000K: 80CRI.
Lumen maintenance:	70% of initial lumens at 50 000 hours (L70)(LM79)
Optic:	Accent light
Material:	Body: Die-cast aluminum Diffuser: 4mm thick acid etched tempered glass. Hardware: Stainless steel screws and silicone gaskets.
Mounting:	Recessed wall installation using back box accessory.
Electrical:	Integral high efficiency LED driver, rated at 50 000 hours. 120V-277V.
Dimming:	Down to 0%, 0-10V (120-277V).
Finish:	Aluminum gray
Weight:	2.65lbs (1.2kg)
Warranty:	5 year limited warranty.
Ratings:	IP65, IK10
Certification:	cULus listed for wet location.



DIMENSIONS

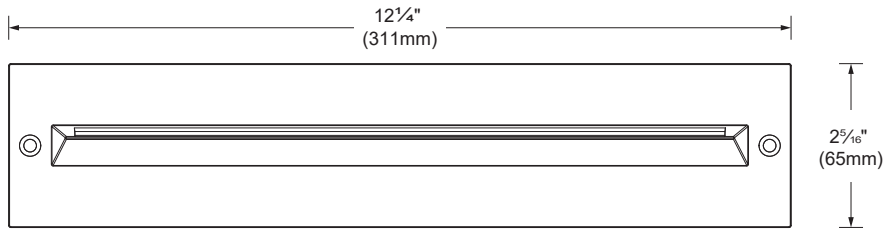

FRONT VIEW

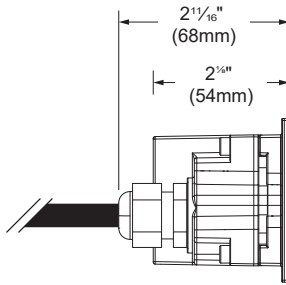


SIDE VIEW

PHOTOMETRIC DATA

Visit sistemalux.com for complete photometric data.


CCT (K)	CRI	LOAD (W)	OPTIC	LUMENS (lm)	EFFICACY (lm / W)	MAX CANDELA (cd)	MODELS
3000K	80	8.3W	Accent light	96	9	78	S6325W
4000K				104	12	84	S6325N

Accent light (3000K, 80 CRI)

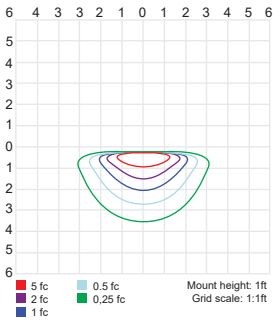

MOUNTING ACCESSORIES
(TO BE ORDERED SEPARATELY)

- ☐ **S6329** - Recessed backbox
Length: 12¼" x 3⅝" (310mm x 79mm)
Depth 3⅜" (86mm)



ORDERING INFO

- **UNV** -
FIXTURE

BACK BOX



MODEL

- ☐ **S6325W** - 3000K, 80CRI ☐ **S6325N** - 4000K, 80CRI

VOLTAGE

- ☒ **UNV** - 120-277V

FINISH

- ☐ **14** - Aluminum gray

DIMMING

- ☐ **D10** - 0-10V (down to 0%)