MINI LOOK
WOOD

SPECIFICATION SHEET

Project name:

Type:

4" Junction box

Single gang box

Wall mounted accent light luminaire with direct light distribution that provides ambient light on vertical surfaces. Suitable for exterior applications.

Luminaire characteristics:
Power input: 13.5W
Lumens: 475 lm (delivered for 3000K)
Luminaire efficacy: 35 lm/W (for 3000K)

Source: White LED, LM80 tested.
3000K: 90CRI
4000K: 90CRI
Lumen maintenance: >70% of initial lumens at 50 000 hours (L70),(LM-79 tested).

Optics: Accent light.

Material:
Body: Die-cast aluminum and oiled teak wood.
Diffuser: Tempered glass.
Mounting plate: Aluminum.

Electrical: Universal high efficiency electronic power supply, rated at 50 000 hours, 120-277V. See page 3 for remote power supply options.

Mounting: See mounting options on page 2.

Finish: White or burnished bronze.

Weight: 2.2lbs (1kg).

Warranty: 5 year limited warranty.

Certification: cULus listed for wet location.

Ratings: IP65, IK06

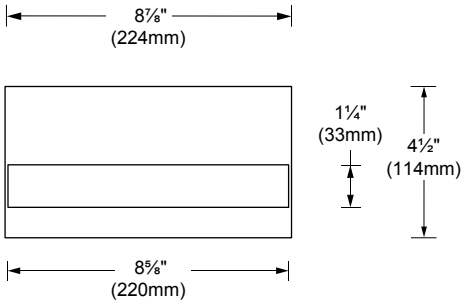

FRONT VIEW



SIDE VIEW

SISTEMALUX

9320 Boul. St-Laurent, suite 100, Montréal (Québec) Canada H2N 1N7
P.: 514.523.1339 F.: 514.525.6107 www.sistemalux.com

TECHNICAL DATA
(Approximate wattage values depending on power supply used)

LOAD (W)	CCT (K)	CRI	OPTIC	DELIVERED LUMENS (lm)	LUMINAIRE EFFICACY (lm / w)	CENTER BEAM CANDLE POWER (cd)	MODEL
13.5W	3000K	90	Accent light	475	35	273	S.L9201W

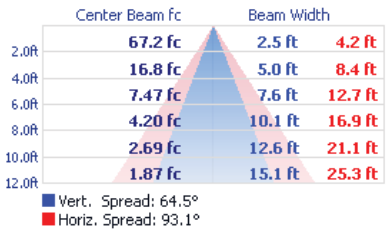



3000K - 90 CRI - Accent light

SURFACE MOUNTING OPTIONS

DF-REM - Direct feed with remote power supply. Connections made inside fixture (14-18AWG). Rigid or flexible conduit up to Ø1" cabtire, romex or bx. installed directly to surface.



J2-REM - 2" junction box with remote power supply. Mounting adapter plate for junction box installation. Min 1⅞" (48mm) deep.



JB-UNV - 4" junction box with integral power supply. Mounting adapter plate for junction box installation. Min 1½" (38mm) deep.

JB-REM - 4" junction box with remote power supply. Mounting adapter plate for junction box installation. Min 1½" (38mm) deep.



SISTEMALUX

9320 Boul. St-Laurent, suite 100, Montréal (Québec) Canada H2N 1N7
P.: 514.523.1339 F.: 514.525.6107 www.sistemalux.com

ORDERING INFO

RESET

MODEL - MOUNTING - VOLTAGE - FINISH

MODEL

- ◯ **S.L9201W -** 3000K
- ◯ **S.L9201N -** 4000K

MOUNTING

- ◯ **DF -** Surface mounted with direct feed
- ◯ **JB -** Surface mounted with Jbox
- ◯ **J2 -** Surface mounted with single gang box

VOLTAGE

- ◯ **UNV -** 120-277V
- ◯ **REM -** 24V remote power supply

FINISH

- ◯ **01 -** White
- ◯ **20 -** Burnished bronze

REMOTE POWER SUPPLY OPTION **(TO BE ORDERED SEPARATELY)**
Requirement for one (1) fixture: 12W, 24VDC

- ◯ **4444-0024-025-UNV-ND**
- ◯ **4549-0024-075-UNV-D10**
- ◯ **4545-0024-075-UNV-ND**
- ◯ **4551-0024-080-120-LTE**
- ◯ **4448-0024-150-UNV-D10**
- ◯ **4546-0024-200-2C-UNV-ND**

REMOTE POWER SUPPLY OPTION
(TO BE ORDERED SEPARATELY)

Watts	Min-Max	Voltage	Rated	Dimming protocal	Box dimentions	Max distance 18AWG	Code
25	1-2	120-277V	Indoor	None	6" X 4" X 3" (152 X 102 X 76mm)	30ft (9m)	4444-0024-025-UNV-ND
150	1-12	120-277V	Indoor	0-10V	10" X 8" X 4" (254 X 203 X 102mm)	25ft (7.5m)	4448-0024-150-UNV-D10
75	1-6	120-277V	Outdoor	0-10V	14¼" X 5" X 3¼" (362 X 127 X 83mm)	30ft (9m)	4549-0024-075-UNV-D10
75	1-6	120-277V	Outdoor	None	11¼" X 3" X 1¾" (285 X 75 X 42mm)	30ft (9m)	4545-0024-075-UNV-ND
80	1-5 (3-5 for DIM)	120V	Outdoor	Leading and trailing edge (ELV and TRIAC)	14" X 5" X 2" (356 X 127 X 51mm)	30ft (9m)	4551-0024-080-120-LTE
200	2-8 Per channel (MAX 16)	120-277V	Outdoor	None	12" X 4½" X 2⅜" (305 X 114 X 60mm)	30ft (9m) Per channel	4546-0024-200-2C-UNV-ND

SISTEMALUX

9320 Boul. St-Laurent, suite 100, Montréal (Québec) Canada H2N 1N7
P.: 514.523.1339 F.: 514.525.6107 www.sistemalux.com